

High capacity, small footprint

MCC Hot self serve humidified
with glass doors
2 levels



The Modular Convenience Counters MCC offer you the best, in every aspect



Highest capacity on a small footprint: Up to 30%* more display surface



Up to 75%* more product visibility due to transparent sides and top



Maximum food safety, extended shelf life and less waste



Unlimited possibilities and combinations with other hot & cold MCC's



Low total cost of ownership & environmental friendly green technologies

*Compared to competition according to global ISO standards - TDA ISO 23953

MCC Hot self serve with glass doors

- 2 level heated and humidified self serve display cabinet
- Designed for packaged and unpackaged products
- Self and soft closing glass doors on customer side
- 600, 900, or 1200 mm wide
- Unlimited possibilities in combining hot and cold side-by-side
- Available as solid back, or with soft closing and sliding glass doors on operator side
- Available as floor model or as drop-in, adaptable to any store design
- Ready to plug in for quick and easy installation
- Underframe floor model available in any RAL colour
- Slim shelves with adjustable angle and height
- LED lighting with natural colour reproduction on each shelf
- Hot Blanket holding technology keeps products at $\geq 65^{\circ}\text{C}$
- Energy saving hot airflow recirculation technology
- Humidification with automatic or manual fill
- Thermo pane glass - increased insulation
- Optional point-of-sales price strips
- Total shelf surface:
 - MCC 60-2: 0.54 m²
 - MCC 90-2: 0.86 m²
 - MCC 120-2: 1.19 m²
- Also available as
 - MCC Hot self serve open display
 - MCC Hot full serve humidified



Two presentation levels



Hot Blanket holding technology



Optimal visibility




Floor model or drop-in version

	MCC 60-2 Hot SS FD	MCC 90-2 Hot SS FD	MCC 120-2 Hot SS FD
Width	600 mm	900 mm	1200 mm
Depth	750 mm	750 mm	750 mm
Height on stand	1420 mm	1420 mm	1420 mm
Height drop-in above worktop	520 mm	520 mm	520 mm
Voltage	1N~ 230V	1N~ 230V	1N~ 230V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Power	1.72 kW	2.08 kW	2.77 kW
Door width*	513 mm	388 mm	538 mm


* MCC 60: 1 door (left or right hinged), MCC 90: 2 doors, MCC 120: 2 doors

MCC Hot SS FD on stand

Solid back

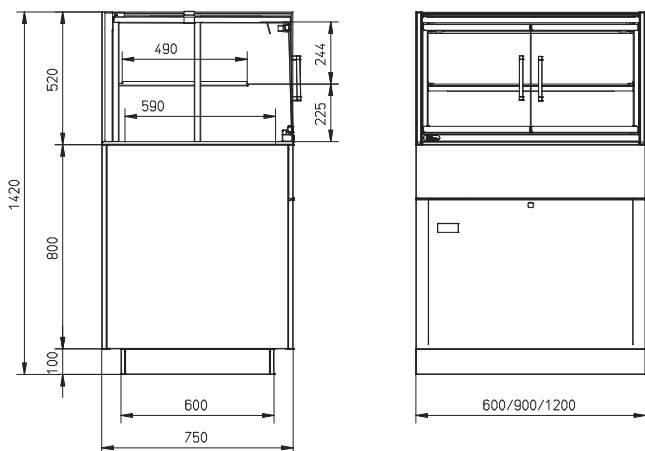


Pass-through

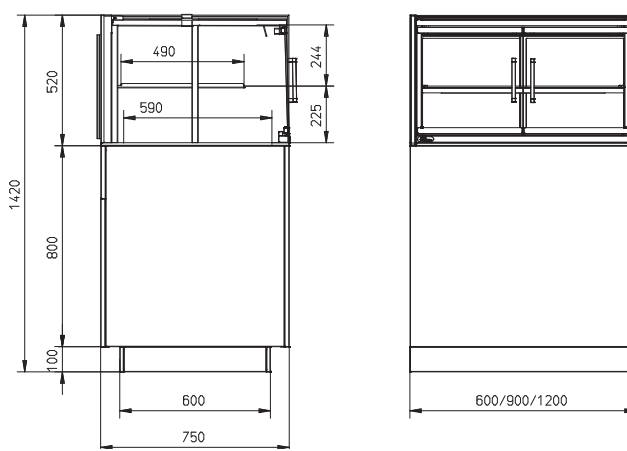

MCC Hot SS FD drop-in

Solid back

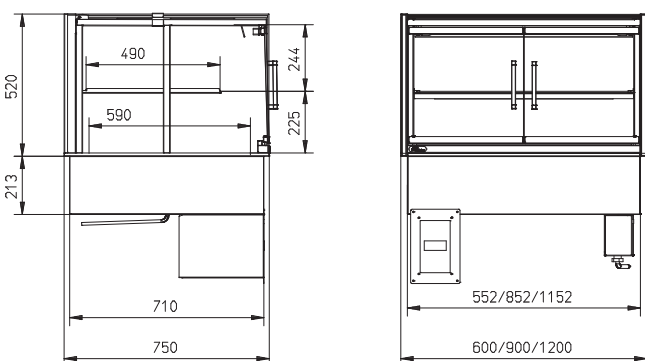

Pass-through

