



Client _____ Quantity _____
 Project _____ Position _____

Thaw.Pro 700 thawing cabinet

Model: A70/1D

Cod: A18070800101

Technical data

Gross capacity:	601 lt
Temperature range:	-6°+40°C
Refrigerant unit:	Plug-in
Energetic class:	D
Energy efficiency index:	66,4
Annual consumption:	746 kW/h annum
24h consumption:	2,043 kW/h/24h
Climate class:	5
Cooling gas:	R290
Defrost:	Hot gas
Valve:	Supplied standard with solenoid
Dimensions (mm):	740×815×2085 mm
Packing dimensions:	835×930×2138 mm
Gross weight:	165 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	1360 W
Absorbed Current:	6,2 A
Cooling capacity:	668 W*
*:	Evap. -10°C Cond. +55°C

Features

Functions:	Thawing, storage, ozone sanitisation
Standard equipment:	10 slides GN2/1, 10 stainless steel GN2/1 shelves
Control:	4,3" touch screen display with USB port
Doors:	1 door, self-closing with a 105° stop, right hinged
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	75 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	AISI 304 stainless steel adjustable h 100/150 mm
Cosmo:	Wi-Fi remote control system

Accessories and variants

Kit für Öffnung der Tür mit Pedal

Stainless steel shelf GN2/1

Pair of type L slides 605 mm


Serial interface, RS485 cable

COSMO - wi-fi control

Cosmo is the wi-fi technology that allows THAW.PRO cabinet to be connected, updated and monitored from smartphones. THAW.PRO is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

*The installation requires a kit for the replacement of the racks

Technical draw

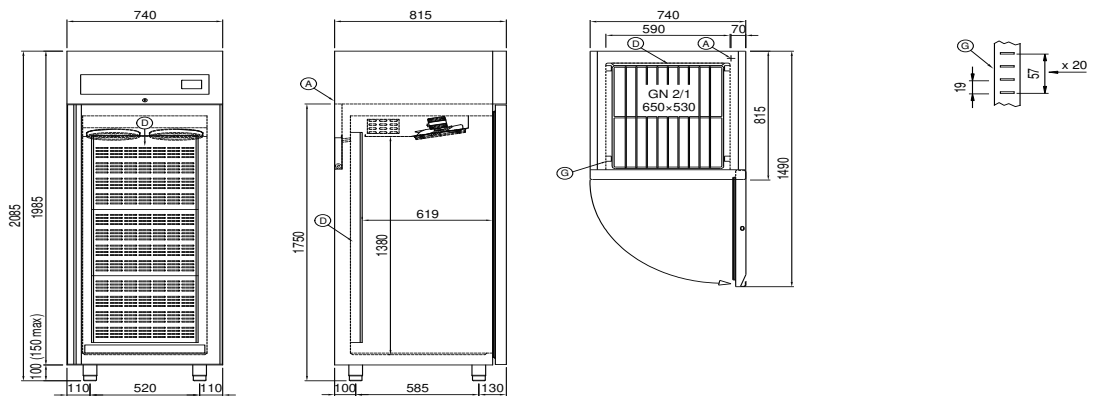

A: Power supply cable outlet

D: Airflow conveyor

G: Racks pitch

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.