

Client _____ Quantity _____
Project _____ Position _____

Levtronic 550 cabinet

Model: A55/1FH

Cod: A32050800101



Technical data

| | |
|--------------------------|---------------------------------|
| Max capacity: | 34 trays EN60x40 |
| Gross capacity: | 489 lt |
| Temperature range: | -6°+40°C |
| Ventilation range: | 25% - 100% |
| Humidity range: | 45% - 95% with humidifier |
| Humidifier: | Including |
| Refrigerant unit: | Plug-in |
| Energetic class: | C |
| Energy efficiency index: | 40,4 |
| Annual consumption: | 454 kW/h annum |
| 24h consumption: | 1,243 kW/h/24h |
| Climate class: | 5 |
| Cooling gas: | R290 |
| Defrost: | Hot gas |
| Valve: | Supplied standard with solenoid |
| Dimensions (mm): | 630×815×2085 mm |
| Packing dimensions: | 835×930×2138 mm |
| Gross weight: | 135 Kg |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 1220 W |
| Absorbed Current: | 5,6 A |

Features

| | |
|------------------------------|--|
| Functions: | Manual proving, retarder prover, continuous cycle, storage |
| Standard equipment: | 20 slides for EN60x40 trays, lock with key, water drain, LED lighting |
| Control: | 4,3" touch screen display with USB port |
| Doors: | 1 door, self-closing with a 105° stop, right hinged |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 75 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | AISI 304 stainless steel adjustable h 100/150 mm |
| Cosmo: | Wi-Fi remote control system |


Accessories and variants

- _____ RAL customisable colouring
- _____ Stainless steel evaporator
- _____ Power supply frequency 60Hz
- _____ Other special voltage
- _____ Kit für Öffnung der Tür mit Pedal
- _____ Purity C Quell ST 50 filter cartridge
- _____ Aluminium coated backing-pan EN60x40 h 20 mm
- _____ Stainless steel shelf EN60x40
- _____ Plastic coated shelf EN60x40
- _____ Pair of type L slides 605 mm
- _____ Serial interface, RS485 cable

COSMO - wi-fi control

Cosmo is the wi-fi technology that allows LEVTRONIC retarder provers to be connected, updated and monitored from smartphones. LEVTRONIC is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

Technical draw

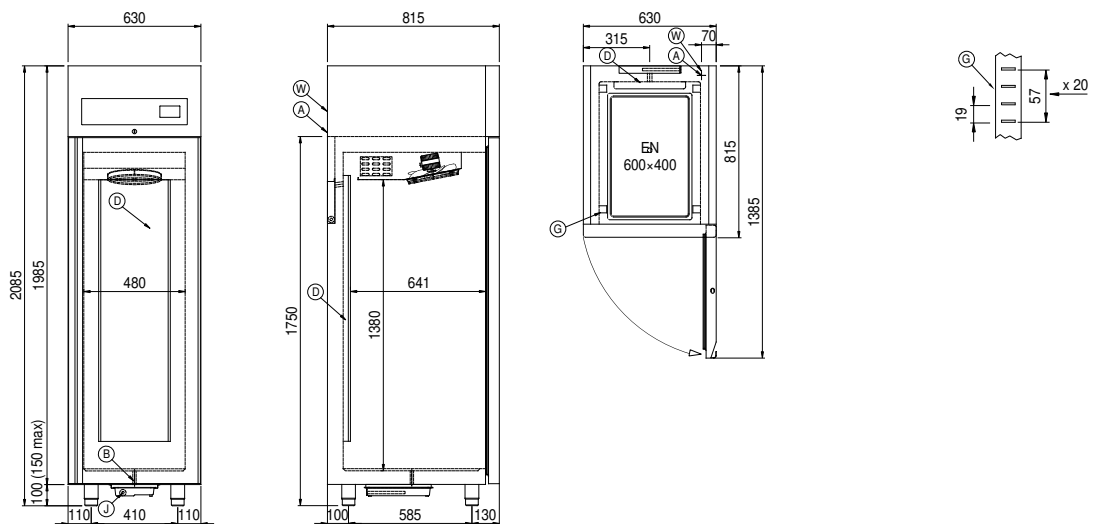

- | | | |
|-------------------------------------|---|---|
| A: Power supply cable outlet | B: Condensation water drain | D: Airflow conveyor |
| G: Racks pitch | J: Automatic evaporation of condensing water | W: Water mains connection for humidifier - 3/4" female. Unloading not required |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.